

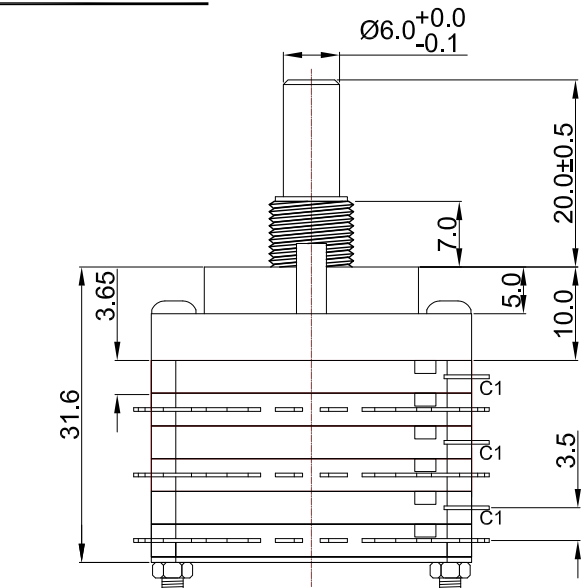


外形图 Mechanical Dimensions

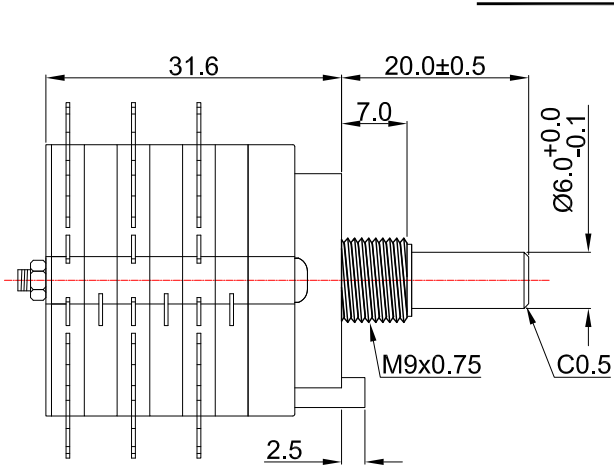


Switch pole 电性回路示意图

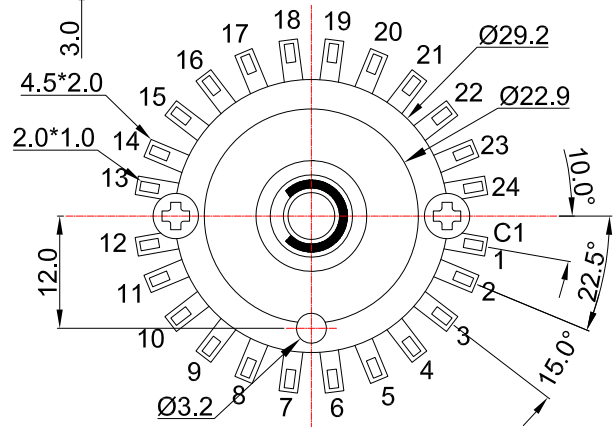


- | | |
|--------------|--------------|
| 1段: 3个C1-1 | 13段: 3个C1-13 |
| 2段: 3个C1-2 | 14段: 3个C1-14 |
| 3段: 3个C1-3 | 15段: 3个C1-15 |
| 4段: 3个C1-4 | 16段: 3个C1-16 |
| 5段: 3个C1-5 | 17段: 3个C1-17 |
| 6段: 3个C1-6 | 18段: 3个C1-18 |
| 7段: 3个C1-7 | 19段: 3个C1-19 |
| 8段: 3个C1-8 | 20段: 3个C1-20 |
| 9段: 3个C1-9 | 21段: 3个C1-21 |
| 10段: 3个C1-10 | 22段: 3个C1-22 |
| 11段: 3个C1-11 | 23段: 3个C1-23 |
| 12段: 3个C1-12 | 24段: 3个C1-24 |

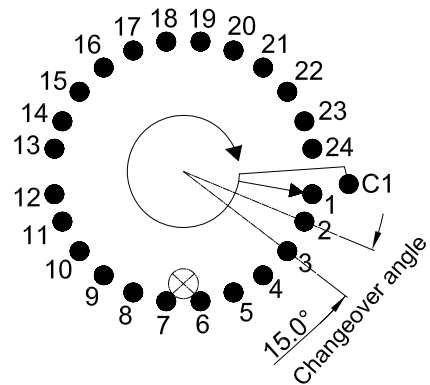

Shaft shown in full C.C.W position



- 1.Changeover timing : **Shorting**
- 2.Changeover angle : **15°**
- 3.SWITCH RATING : DC 30V 0.5A
- 4.WITHSTAND VOLTAGE : for 1 minute at DC 500V
- 5.INSULATION RESISTANCE: DC 500V 100MΩ MIN
- 6.CONTACT RESISTANCE: 25mΩ MAX
- 7.SWITCH LIFE:10,000cycles
- 8.SOLDERING HEAT : 260 dergee and less than 5 seconds
- 9.TORQUE: 1TO 2 SECTION 0.8kg±0.2kg

3				PRODUCT NAME	Rotary switch	
2				MODEL NAME	RS3803-20RB1-1-24P	
1				APPROVED BY	CHECKED BY	DRAWN BY
NO	DATE	DESCRIPTION				
		DIMENSION	TOLERANCE	SCALE		
		$\int \leq 10$	± 0.2	UNIT	mm	
		$10 < \int \leq 30$	± 0.5	VER.	A0	
		$30 < \int \leq 100$	± 1.0	DATE	2014/09/04	
		All Angles	$\pm 5^\circ$			
				 R & D 2014/09/04 Eva	 R & D 2014/09/04 Sophie	 R & D 2014/09/04 Dick