

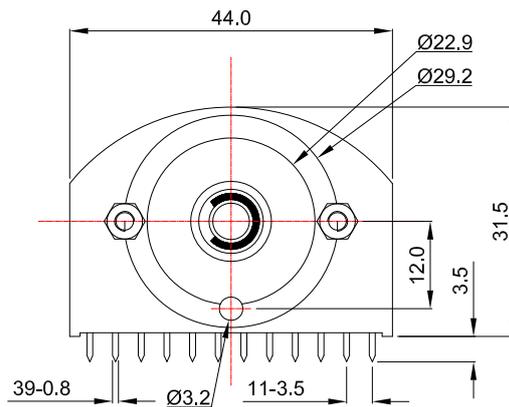


外形图 Mechanical Dimensions

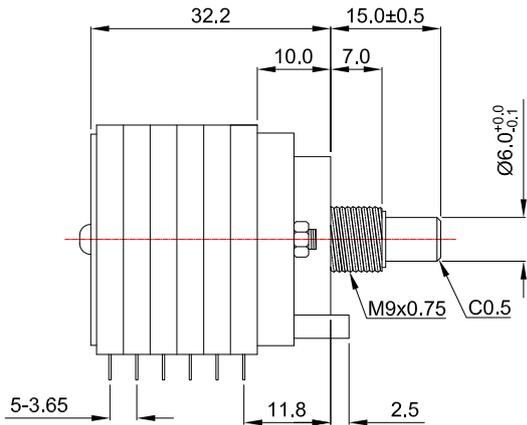


Shaft shown in full
C.C.W position

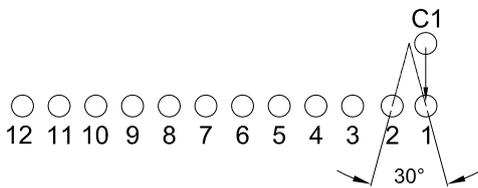


Switch pole 电性回路示意图

- | | |
|------------|-------------|
| A段: 3个C1-1 | G段: 3个C1-7 |
| B段: 3个C1-2 | H段: 3个C1-8 |
| C段: 3个C1-3 | I段: 3个C1-9 |
| D段: 3个C1-4 | J段: 3个C1-10 |
| E段: 3个C1-5 | K段: 3个C1-11 |
| F段: 3个C1-6 | L段: 3个C1-12 |

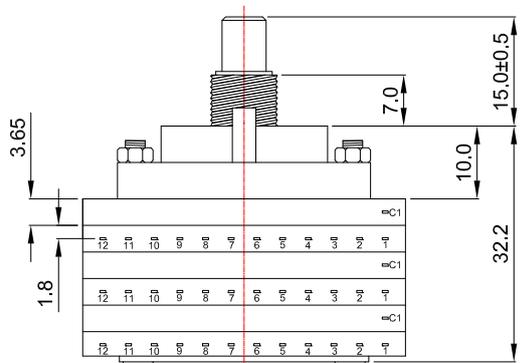

安装孔位置图
P.C.B. mounting hole detail

1. SWITCH RATING : DC 30V 0.5A
2. WITHSTAND VOLTAGE : for 1 minute at DC 500V
3. INSULATION RESISTANCE : DC 500V 100MΩ MIN
4. CONTACT RESISTANCE : 25mΩ MAX
5. SWITCH LIFE : 10,000 cycles
6. SOLDERING HEAT : 260 degree and less than 5 seconds
7. TORQUE : 1 TO 2 SECTION 0.8kg±0.2kg
OVER 3 SECTION 2.5kg±1kg

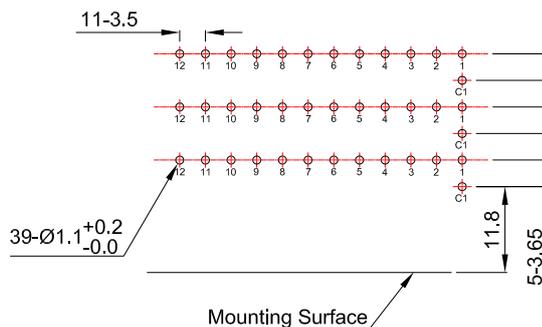

3			PRODUCT NAME	Rotary switch		
2			MODEL NAME	RS44-3-3-12-7-15R		
1			APPROVED BY	CHECKED BY	DRAWN BY	
NO	DATE	DESCRIPTION				
		DIMENSION	TOLERANCE	SCALE		
		$\int \leq 10$	± 0.2	UNIT	mm	
		$10 < \int \leq 30$	± 0.5	VER.	A0	
		$30 < \int \leq 100$	± 1.0	DATE	2017/12/8	
		All Angles	$\pm 5^\circ$			
						