



# 16mm common drawing



接线图  
Circuit explanation



Attached parts : nut & washer





Model No. R1612G-xy 1- taper value

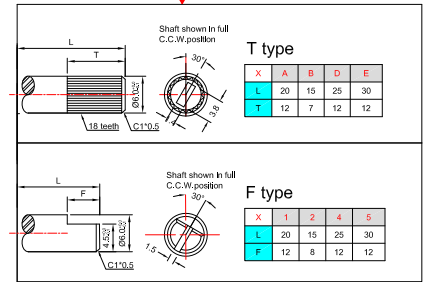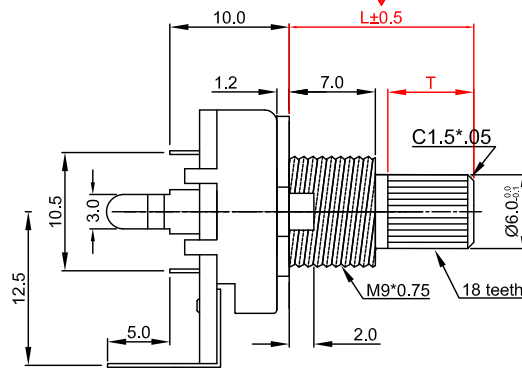




R1612G-xA1

R1612G-xC1




R1612G-xD1

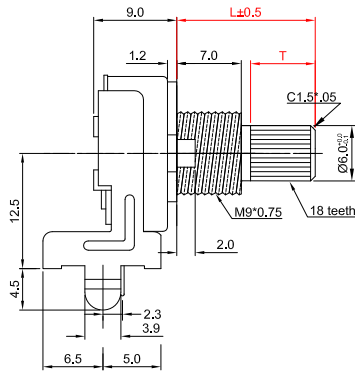


Shaft shown in full C.C.W.position



Shaft shown in full C.C.W.position

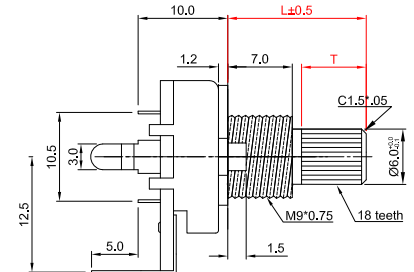

Shaft shown in full C.C.W.position



YU WAH ( D G ) CO.,LTD

# 16 mm Rotary Potentiometers series Specifications

1. 電氣性能 (Electrical Characteristics)		
1.1	全阻抗值 (Total Resistance)	1K $\Omega$ ~ 2M $\Omega$
1.2	全阻抗值允許偏差 (Total Resistance Tolerance)	$\pm 20\%$ ( More than 1 M $\Omega$ $\pm 30\%$ )
1.3	電阻隨溫度變化特性 Resistance of temperature change character)	20 $^{\circ}$ C -75 $^{\circ}$ C : $\Delta R/R \leq \pm 5\%$ , -25 $^{\circ}$ C -20 $^{\circ}$ C : $\Delta R/R \leq \pm 4.5\%$
1.4	阻值變化特性 (Resistance Taper)	A, B, C, W
1.5	零位阻值 (Residual Resistance)	R $\geq$ 250K $\Omega$ / 0.1 % max. of total Value 250K $\Omega$ > R > 10K $\Omega$ / 20 $\Omega$ max. 10K $\Omega$ > R / 10 $\Omega$ max.
1.6	額定功率 (Rated Power)	Linear Taper B: 0.1W Other Taper: 0.05W
1.7	最高使用電壓 (Max. Operating Voltage)	50V AC
1.8	動雜音 (Rotational Noise)	Less Than 100mV
1.9	絕緣阻抗 (Insulation Resistance)	More than 50M $\Omega$ at DC 250V
1.10	耐電壓 (Withstand Voltage)	For 1 minute at: AC 250V
1.11	開關額定功率 (Switch Rated Power)	-----
1.12	同步誤差 (Gang Error)	0dB ~ -40dB $\leq$ 3dB
2. 機械性能 (Mechanical Characteristics)		
2.1	全回轉角度 (Rotation Angle)	300 $^{\circ}$ $\pm$ 10 $^{\circ}$
2.2	旋轉力矩 (Rotation Torque)	20 ~ 200gf.cm
2.3	軸的拉、押強度 (Pull-Push Strength)	6 Kgf.cm
2.4	轉動止檔強度 (Rotational Stop-End Torque)	5 kgf.cm Min
2.5	開關角度 (Switch Working Angel)	-----
2.6	開關力矩 (Switch Working Torque)	-----
2.7	旋轉定位數目 (Number of Detents (click))	detent: 0 ; 1;
2.8	焊錫耐熱性 (Resistance To Soldering Heat)	<u>260<math>\pm</math>5<math>^{\circ}</math>C</u> and less than <u>3</u> seconds
3. 耐久性能 (Durability)		
3.1	回轉壽命 (Rotation Life)	10,000 Cycles min.
3.2	工作溫度 (Operating temperature)	-10 $^{\circ}$ C ~ +70 $^{\circ}$ C
4.1	外形尺寸圖/曲線特性圖 (Shape size drawing/curve characteristic drawing)	見附頁 Please refer the drawing