

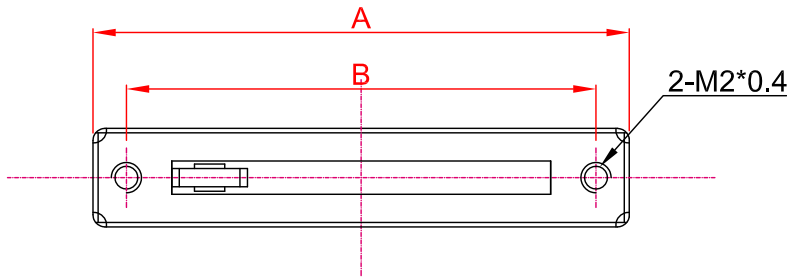
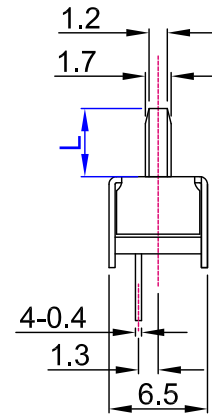



外形图 Mechanical Dimensions

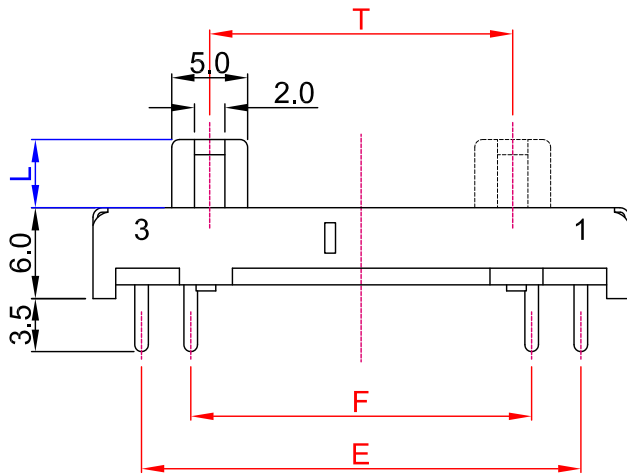

安装孔位图
P.C.B. mounting hole detail

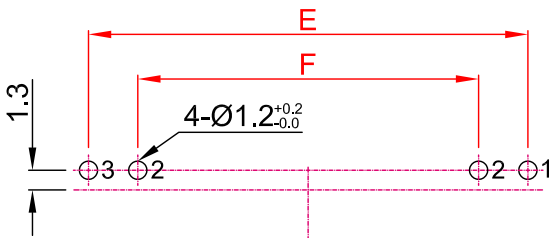

接线图
Circuit explanation

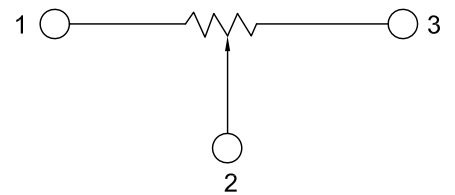

塑胶推柄 (Insulated Lever)






X	1	2	3	4	5	
L	4.5	6.5	8.5	9.5	15	

	MODEL NO.	T	A	B	E	F
<input type="checkbox"/>	C1540N	15	30	26	24	17.5
<input type="checkbox"/>	C2040N	20	35	31	29	22.5

3						PRODUCT NAME	Slide Potentiometer	
2						MODEL NAME	C <input type="checkbox"/> <input type="checkbox"/> 40N - <input type="checkbox"/> A2-value	
1								
NO	DATE	DESCRIPTION				APPROVED BY	CHECKED BY	DRAWN BY
		DIMENSION	TOLERANCE	SCALE		<div style="border: 1px solid black; border-radius: 50%; padding: 5px; width: 60px; margin: 0 auto;">R & D</div> <div style="border: 1px solid black; border-radius: 50%; padding: 5px; width: 60px; margin: 0 auto;">2018/4/28</div> <div style="border: 1px solid black; border-radius: 50%; padding: 5px; width: 60px; margin: 0 auto;">Eva</div>	<div style="border: 1px solid black; border-radius: 50%; padding: 5px; width: 60px; margin: 0 auto;">R & D</div> <div style="border: 1px solid black; border-radius: 50%; padding: 5px; width: 60px; margin: 0 auto;">2018/4/28</div> <div style="border: 1px solid black; border-radius: 50%; padding: 5px; width: 60px; margin: 0 auto;">Sophie</div>	<div style="border: 1px solid black; border-radius: 50%; padding: 5px; width: 60px; margin: 0 auto;">R & D</div> <div style="border: 1px solid black; border-radius: 50%; padding: 5px; width: 60px; margin: 0 auto;">2018/4/28</div> <div style="border: 1px solid black; border-radius: 50%; padding: 5px; width: 60px; margin: 0 auto;">Dick</div>
		$\int \leq 10$	± 0.2	UNIT	mm			
		$10 < \int \leq 30$	± 0.5	VER.	A0			
		$30 < \int \leq 100$	± 1.0	DATE	2018/4/28			
		All Angles	$\pm 5^\circ$					


直滑式 Rotary Potentiometers series Specifications

1.電氣性能 (Electrical Characteristics)					
1.1	全阻抗值 (Total Resistance)		1K Ω ~ 2M Ω		
1.2	全阻抗值允许偏差 (Total Resistance Tolerance)		$\pm 20\%$ (More than 1 M Ω $\pm 30\%$)		
1.3	電阻隨溫度變化特性 (Resistance of temperature change character)		20 $^{\circ}$ C-75 $^{\circ}$ C: $\Delta R/R \leq \pm 5\%$, -25 $^{\circ}$ C-20 $^{\circ}$ C: $\Delta R/R \leq \pm 4.5\%$		
1.4	阻值變化特性 (Resistance Taper)		A, B, C, W		
1.5	零位阻值 (Residual Resistance)		R \geq 250K Ω / 0.1 % max. of total Value 250K Ω >R>10K Ω / 20 Ω max. 10K Ω \geq R / 10 Ω max.		
1.6	額定功率 (Rated Power)		Linear Taper B: 0.1W Other Taper:0.05W		
1.7	最高使用電壓 (Max.Operating Voltage)		50V AC		
1.8	動雜音 (Rotational Noise)		Less Than 100mV		
1.9	絕緣阻抗 (Insulation Resistance)		More than 100M Ω at DC 250V		
1.10	耐電壓 (Withstand Voltage)		For 1 minute at: AC 300V		
1.11	开关額定功率(Switch Rated Power)		-----		
1.12	同步誤差 (Gang Error)		-----		
2.機械性能 (Mechanical Characteristics)					
2.1	滑动行程 (Slide travel)		T=(15,20) \pm 1.0mm		
2.2	滑动力矩 (Operating force)		10~200gf.cm		
2.3	柄的拉、押強度 (Pull-Push Strength)		Pull 3Kgf.cm / Push 5 Kgf.cm		
2.4	滑动止檔強度 (Rotational Stop-End Torque)		5 kgf.cm Min		
2.5	推柄摆动度 (Lever wobble)		2xL/25mm Max. (L=Lever length)		
2.6	旋轉定位數目 (Number of Detents(click))		detent: 0 ; 1 centre Click		
2.7	焊錫耐熱性 (Resistance To Soldering Heat)		260 \pm 5 $^{\circ}$ C and less than 3 seconds		
3.耐久性能 (Durability)					
3.1	回轉壽命 (Rotation Life)		10,000 Cycles min.		
3.2	工作溫度 (Operating temperature)		-10 $^{\circ}$ C ~ +70 $^{\circ}$ C		
4.1	外形尺寸圖/曲線特性圖 (Shape size drawing/curve characteristic drawing)		見附頁 Please refer the drawing		
批 准			審 核		
			設 計		


RESISTANCE TAPER




TAPER B SERIES

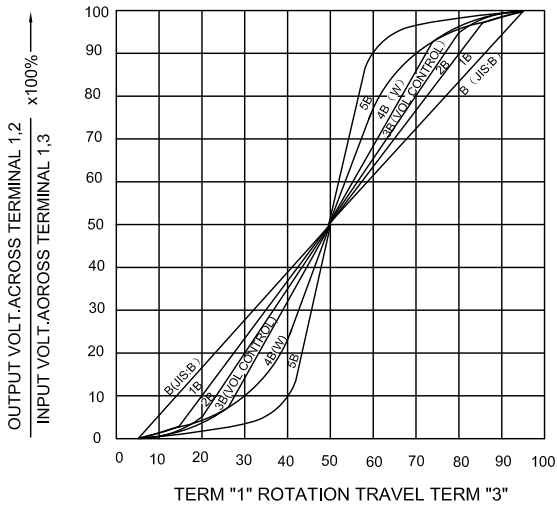


TAPER B WITH 50% TAP

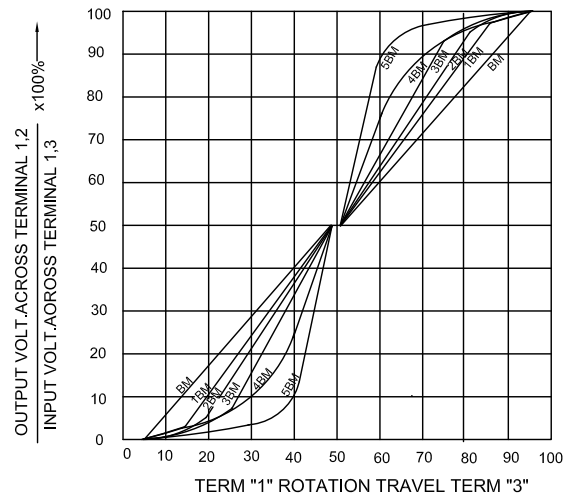


TAPER A SERIES

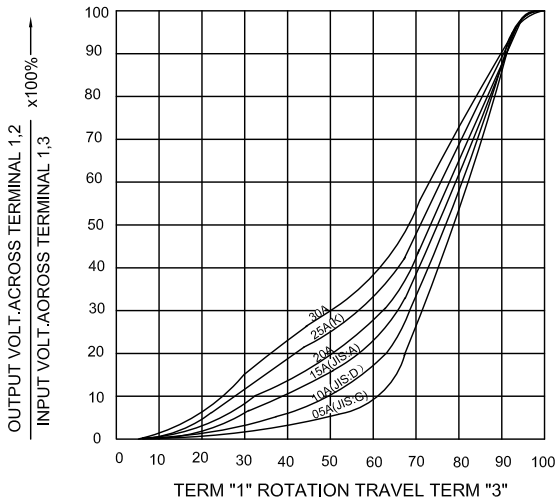

TAPER A & C WITH 50% TAP

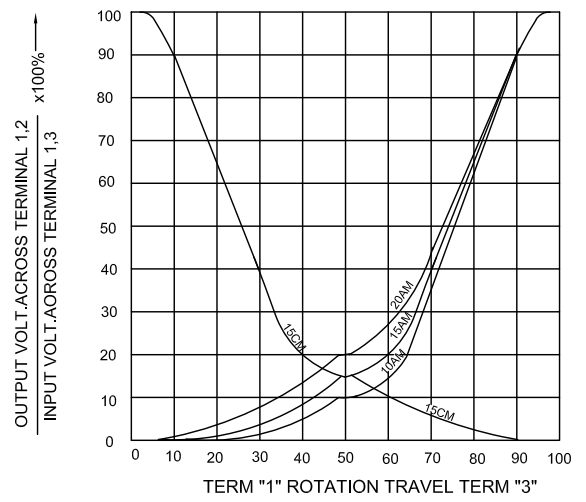

TAPER C SERIES

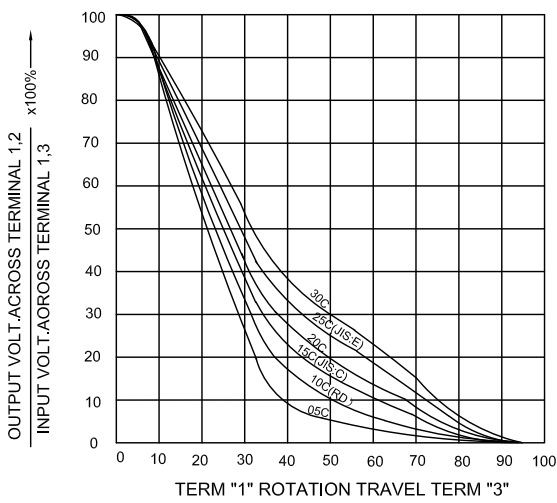

TAPER M & N SERIES

