

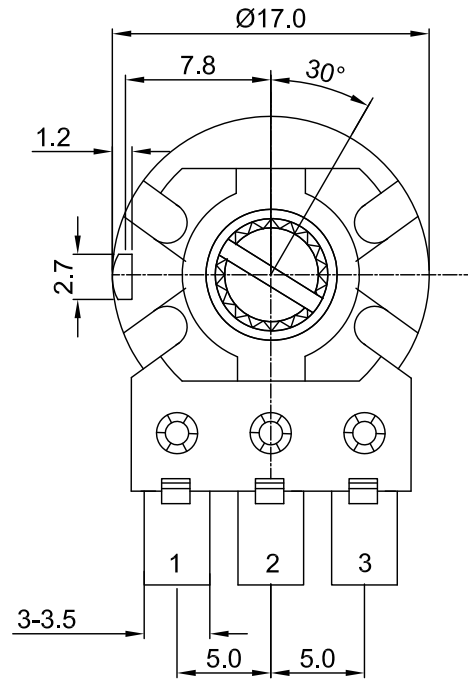


外形图 Mechanical Dimensions

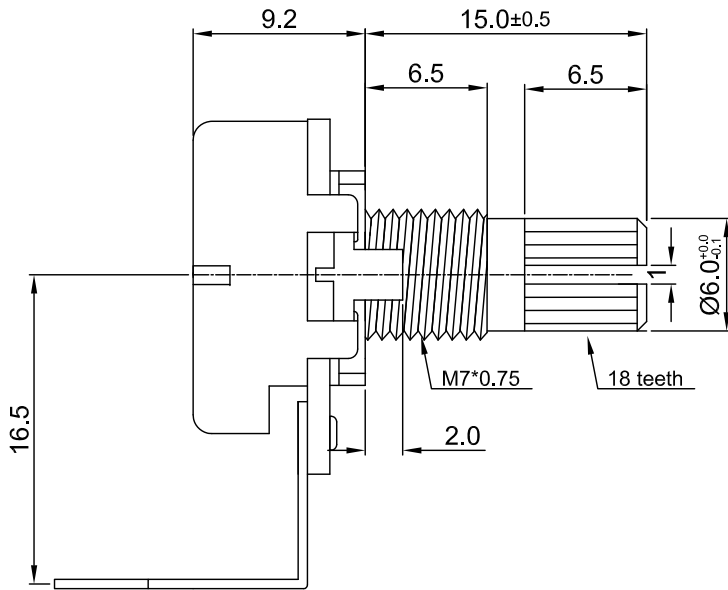


接线图
Circuit explanation

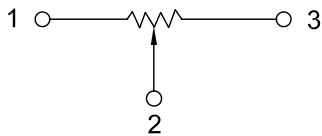


Shaft shown in full C.C.W. position

安装孔位置图
P.C.B. mounting hole detail

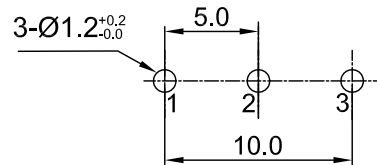

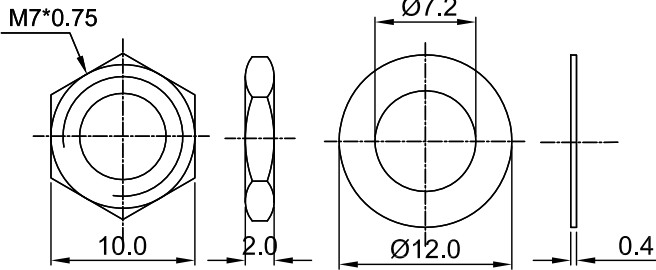

Attached parts : nut & washer




<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="text-align: center;">3</td> <td></td> <td></td> <td></td> <td>PRODUCT NAME</td> <td colspan="2" style="text-align: center;">Rotary Potentiometer</td> </tr> <tr> <td style="text-align: center;">2</td> <td></td> <td></td> <td></td> <td>MODEL NAME</td> <td colspan="2" style="text-align: center;">RD1610N-2D1-value</td> </tr> <tr> <td style="text-align: center;">1</td> <td></td> <td></td> <td></td> <td>APPROVED BY</td> <td style="text-align: center;">CHECKED BY</td> <td style="text-align: center;">DRAWN BY</td> </tr> <tr> <td>NO</td> <td>DATE</td> <td colspan="2">DESCRIPTION</td> <td rowspan="4" style="text-align: center;"> <div style="border: 1px solid black; border-radius: 50%; width: 60px; height: 60px; display: flex; flex-direction: column; justify-content: center; align-items: center;"> <div style="border-bottom: 1px solid black; padding: 2px;">R & D</div> <div style="border-bottom: 1px solid black; padding: 2px;">2015/5/25</div> <div style="padding: 2px;">Eva</div> </div> </td> <td rowspan="4" style="text-align: center;"> <div style="border: 1px solid black; border-radius: 50%; width: 60px; height: 60px; display: flex; flex-direction: column; justify-content: center; align-items: center;"> <div style="border-bottom: 1px solid black; padding: 2px;">R & D</div> <div style="border-bottom: 1px solid black; padding: 2px;">2015/5/25</div> <div style="padding: 2px;">Sophie</div> </div> </td> <td rowspan="4" style="text-align: center;"> <div style="border: 1px solid black; border-radius: 50%; width: 60px; height: 60px; display: flex; flex-direction: column; justify-content: center; align-items: center;"> <div style="border-bottom: 1px solid black; padding: 2px;">R & D</div> <div style="border-bottom: 1px solid black; padding: 2px;">2015/5/25</div> <div style="padding: 2px;">Ball</div> </div> </td> </tr> <tr> <td>DIMENSION</td> <td>TOLERANCE</td> <td>SCALE</td> </tr> <tr> <td>$\int \leq 10$</td> <td>± 0.2</td> <td>UNIT</td> <td>mm</td> </tr> <tr> <td>$10 < \int \leq 30$</td> <td>± 0.5</td> <td>VER.</td> <td>A0</td> </tr> <tr> <td>$30 < \int \leq 100$</td> <td>± 1.0</td> <td>DATE</td> <td>2015/5/25</td> </tr> <tr> <td>All Angles</td> <td>$\pm 5^\circ$</td> <td></td> <td></td> </tr> </table>				3				PRODUCT NAME	Rotary Potentiometer		2				MODEL NAME	RD1610N-2D1-value		1				APPROVED BY	CHECKED BY	DRAWN BY	NO	DATE	DESCRIPTION		<div style="border: 1px solid black; border-radius: 50%; width: 60px; height: 60px; display: flex; flex-direction: column; justify-content: center; align-items: center;"> <div style="border-bottom: 1px solid black; padding: 2px;">R & D</div> <div style="border-bottom: 1px solid black; padding: 2px;">2015/5/25</div> <div style="padding: 2px;">Eva</div> </div>	<div style="border: 1px solid black; border-radius: 50%; width: 60px; height: 60px; display: flex; flex-direction: column; justify-content: center; align-items: center;"> <div style="border-bottom: 1px solid black; padding: 2px;">R & D</div> <div style="border-bottom: 1px solid black; padding: 2px;">2015/5/25</div> <div style="padding: 2px;">Sophie</div> </div>	<div style="border: 1px solid black; border-radius: 50%; width: 60px; height: 60px; display: flex; flex-direction: column; justify-content: center; align-items: center;"> <div style="border-bottom: 1px solid black; padding: 2px;">R & D</div> <div style="border-bottom: 1px solid black; padding: 2px;">2015/5/25</div> <div style="padding: 2px;">Ball</div> </div>	DIMENSION	TOLERANCE	SCALE	$\int \leq 10$	± 0.2	UNIT	mm	$10 < \int \leq 30$	± 0.5	VER.	A0	$30 < \int \leq 100$	± 1.0	DATE	2015/5/25	All Angles	$\pm 5^\circ$				
3				PRODUCT NAME	Rotary Potentiometer																																															
2				MODEL NAME	RD1610N-2D1-value																																															
1				APPROVED BY	CHECKED BY	DRAWN BY																																														
NO	DATE	DESCRIPTION		<div style="border: 1px solid black; border-radius: 50%; width: 60px; height: 60px; display: flex; flex-direction: column; justify-content: center; align-items: center;"> <div style="border-bottom: 1px solid black; padding: 2px;">R & D</div> <div style="border-bottom: 1px solid black; padding: 2px;">2015/5/25</div> <div style="padding: 2px;">Eva</div> </div>	<div style="border: 1px solid black; border-radius: 50%; width: 60px; height: 60px; display: flex; flex-direction: column; justify-content: center; align-items: center;"> <div style="border-bottom: 1px solid black; padding: 2px;">R & D</div> <div style="border-bottom: 1px solid black; padding: 2px;">2015/5/25</div> <div style="padding: 2px;">Sophie</div> </div>	<div style="border: 1px solid black; border-radius: 50%; width: 60px; height: 60px; display: flex; flex-direction: column; justify-content: center; align-items: center;"> <div style="border-bottom: 1px solid black; padding: 2px;">R & D</div> <div style="border-bottom: 1px solid black; padding: 2px;">2015/5/25</div> <div style="padding: 2px;">Ball</div> </div>																																														
DIMENSION	TOLERANCE	SCALE																																																		
$\int \leq 10$	± 0.2	UNIT	mm																																																	
$10 < \int \leq 30$	± 0.5	VER.	A0																																																	
$30 < \int \leq 100$	± 1.0	DATE	2015/5/25																																																	
All Angles	$\pm 5^\circ$																																																			

16 mm Rotary Potentiometers series Specifications


1. 電氣性能 (Electrical Characteristics)					
1.1	全阻抗值 (Total Resistance)		1K Ω ~ 2M Ω		
1.2	全阻抗值允許偏差 (Total Resistance Tolerance)		$\pm 20\%$ (More than 1 M Ω $\pm 30\%$)		
1.3	電阻隨溫度變化特性 Resistance of temperature change character)		20 $^{\circ}$ C -75 $^{\circ}$ C : $\Delta R/R \leq \pm 5\%$, -25 $^{\circ}$ C -20 $^{\circ}$ C : $\Delta R/R \leq \pm 4.5\%$		
1.4	阻值變化特性 (Resistance Taper)		A, B , C, W		
1.5	零位阻值 (Residual Resistance)		R \geq 250K Ω / 0.1 % max. of total Value 250K Ω >R>10K Ω / 20 Ω max. 10K Ω >R / 10 Ω max.		
1.6	額定功率 (Rated Power)		Linear Taper B: 0.2W Other Taper:0.1W		
1.7	最高使用電壓 (Max.Operating Voltage)		150V AC		
1.8	動雜音 (Rotational Noise)		Less Than 100mV		
1.9	絕緣阻抗 (Insulation Resistance)		More than 100M Ω at DC 500V		
1.10	耐電壓 (Withstand Voltage)		For 1 minute at: AC 500V		
1.11	開關額定功率(Switch Rated Power)		-----		
1.12	同步誤差 (Gang Error)		-----		
2. 機械性能 (Mechanical Characteristics)					
2.1	全回轉角度 (Rotation Angle)		300 $^{\circ}$ \pm 10 $^{\circ}$		
2.2	旋轉力矩 (Rotation Torque)		20~200gf.cm		
2.3	軸的拉、押強度 (Pull-Push Strength)		6 Kgf.cm		
2.4	轉動止檔強度 (Rotational Stop-End Torque)		5 kgf.cm Min		
2.5	開關角度(Switch Working Angel)		-----		
2.6	開關力矩(Switch Working Torque)		-----		
2.7	旋轉定位數目 (Number of Detents(click))		detent: 0 ; 1; 11; 21; 31; 41		
2.8	焊錫耐熱性 (Resistance To Soldering Heat)		<u>260\pm5$^{\circ}$C</u> and less than <u>3</u> seconds		
3. 耐久性能 (Durability)					
3.1	回轉壽命 (Rotation Life)		10,000 Cycles min.		
3.2	工作溫度 (Operating temperature)		-10 $^{\circ}$ C ~+70 $^{\circ}$ C		
4.1	外形尺寸圖/曲線特性圖 (Shape size drawing/curve characteristic drawing)		見附頁 Please refer the drawing		
批 准		審 核		設 計	

RESISTANCE TAPER


TAPER B SERIES

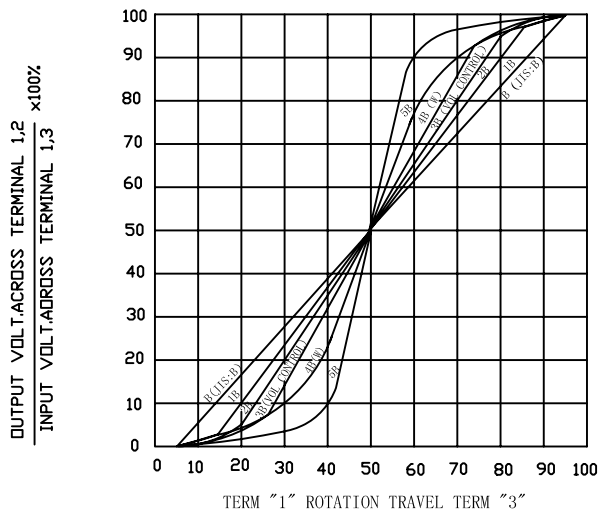


TAPER B WITH 50% TAP

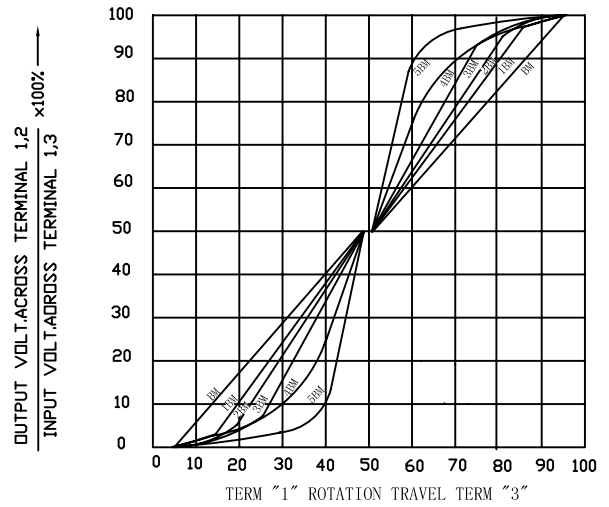


TAPER A SERIES

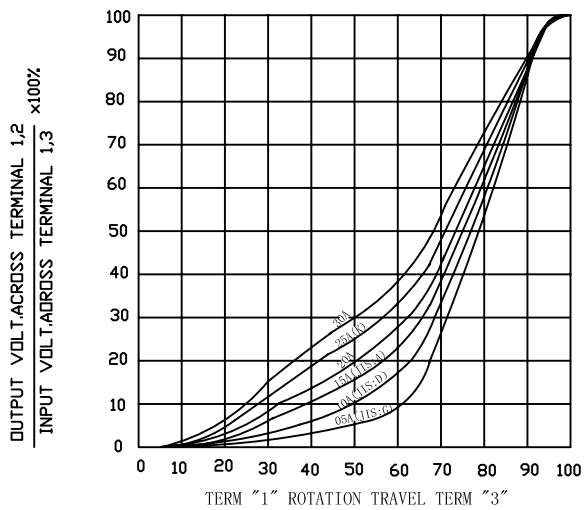

TAPER A & C WITH 50% TAP

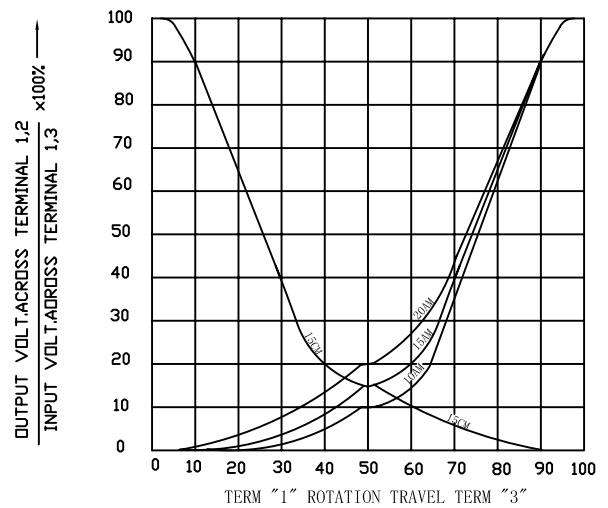

TAPER C SERIES

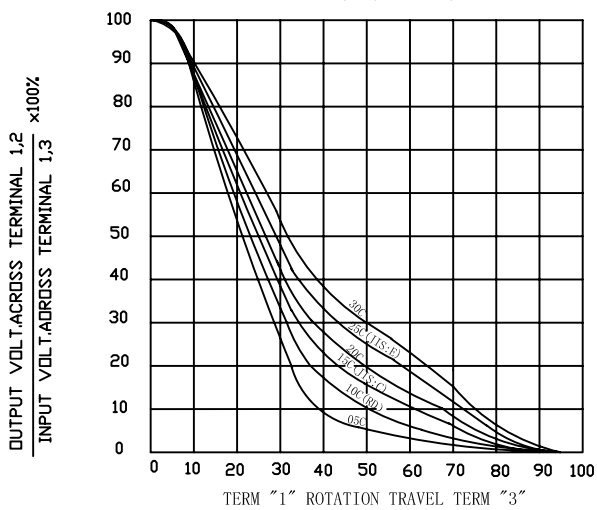

TAPER M & N SERIES

