

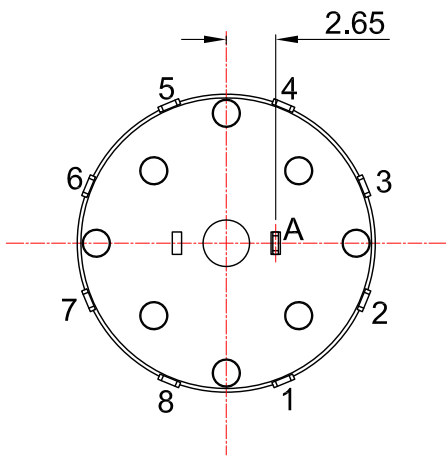



外形图 Mechanical Dimensions

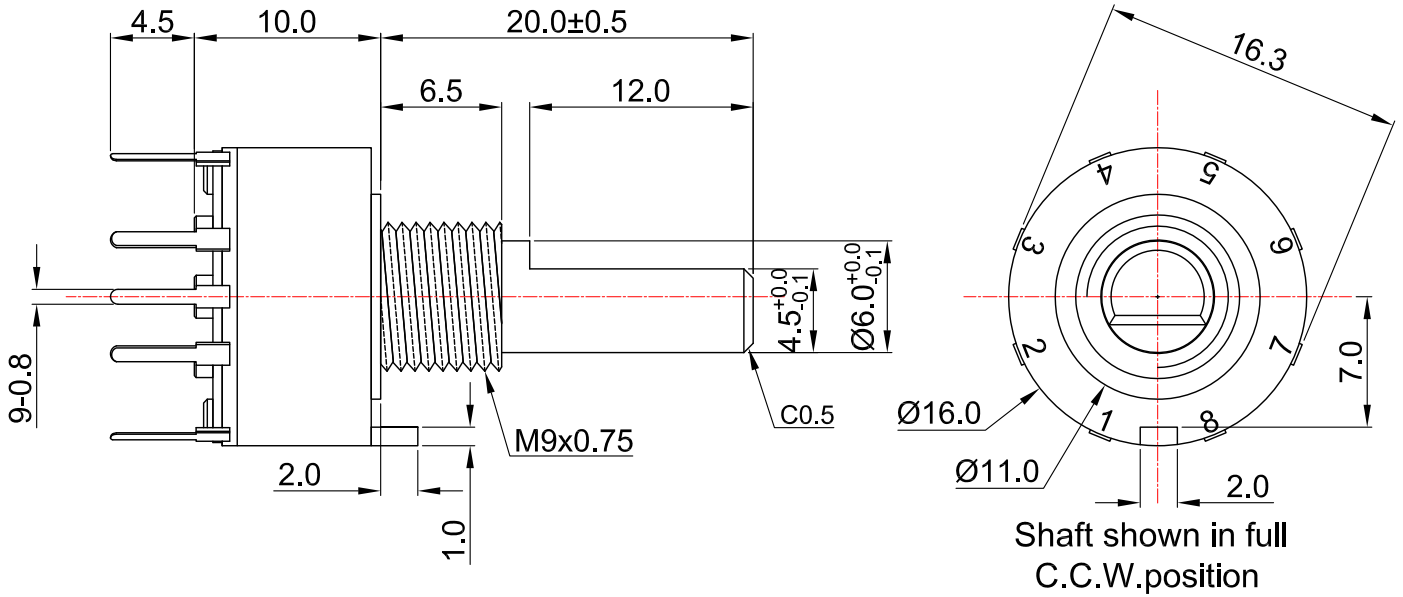


接线图
Circuit explanation

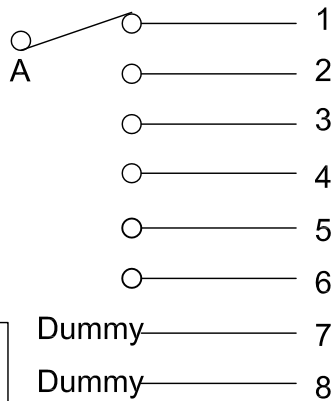

安装孔位置图
P.C.B. mounting hole detail

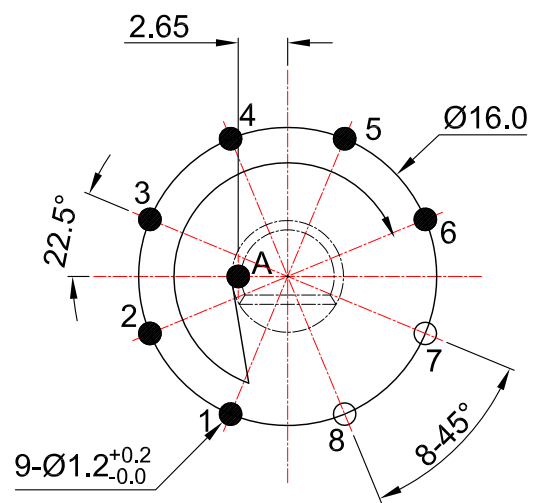

Attached parts : nut & washer

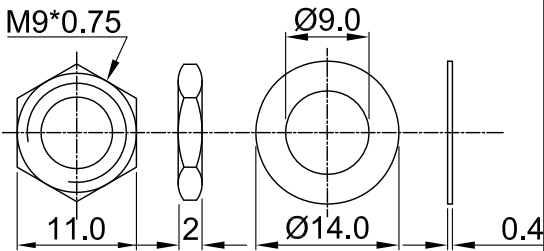

3				PRODUCT NAME	Rotary Switch			
2				MODEL NAME	RS16-20FA1-1-8P(6P)-SW45°			
1				APPROVED BY	CHECKED BY	DRAWN BY		
NO	DATE	DESCRIPTION		<div style="border: 1px solid black; border-radius: 50%; padding: 5px; width: 60px; margin: 0 auto;"> <p style="color: red; font-weight: bold; margin: 0;">R & D</p> <p style="margin: 0;">2020-3-15</p> <p style="margin: 0;">Eva</p> </div>	<div style="border: 1px solid black; border-radius: 50%; padding: 5px; width: 60px; margin: 0 auto;"> <p style="color: red; font-weight: bold; margin: 0;">R & D</p> <p style="margin: 0;">2020-3-15</p> <p style="margin: 0;">Sophie</p> </div>	<div style="border: 1px solid black; border-radius: 50%; padding: 5px; width: 60px; margin: 0 auto;"> <p style="color: red; font-weight: bold; margin: 0;">R & D</p> <p style="margin: 0;">2020-3-15</p> <p style="margin: 0;">Dick</p> </div>		
DIMENSION	TOLERANCE	SCALE	UNIT					mm
$\int \leq 10$	± 0.2	UNIT	mm					
$10 < \int \leq 30$	± 0.5	VER.	A0					
$30 < \int \leq 100$	± 1.0	DATE	2020-3-15					
All Angles	$\pm 5^\circ$							

16mm Rotary Switch Specifications

1. 電氣性能 (Electrical Characteristics)					
1.1	切換時序 (Changeover timing)	Non shorting			
1.2	額定功率 (Rated Power)	0.3A			
1.3	最高使用電壓 (Max.Operating Voltage)	16V DC			
1.4	接觸電阻初期 (Contact Resistance-initial performance)	100mΩ Max.			
	接觸電阻壽命后 (Contact Resistance-After lifetime)	200mΩ Max.			
1.5	絕緣阻抗 (Insulation Resistance)	100MΩ Min. at DC 500V			
1.6	耐電壓 (Withstand Voltage)	For 1 minute at: AC 500V			
2. 機械性能 (Mechanical Characteristics)					
2.1	旋轉力矩 (Rotation Torque)	100~600gf.cm			
2.2	軸的拉、押強度 (Pull-Push Strength)	5 Kgf.cm			
2.3	轉動止檔強度 (Rotational Stop-End Torque)	5 kgf.cm			
2.4	切換開關角度 (Changeover angle)	45°			
2.5	回路數 (Poles)	1			
2.6	接觸點 (positions)	6			
2.7	焊錫耐熱性-手工焊接 (Soldering Heat with Manual)	350°±10°C Max. 3s			
	焊錫耐熱性-浸焊 (Soldering Heat with Dip)	260°±5°C Max. 3s			
3. 耐久性能 (Durability)					
3.1	回轉壽命 (Rotation Life)	10,000 Cycles min.			
3.2	工作溫度 (Operating temperature)	-10°C ~ +70°C			
4.1	外形尺寸圖/曲線特性圖 (Shape size drawing/curve characteristic drawing)	見附頁 Please refer the drawing			
批准		審核		設計	