

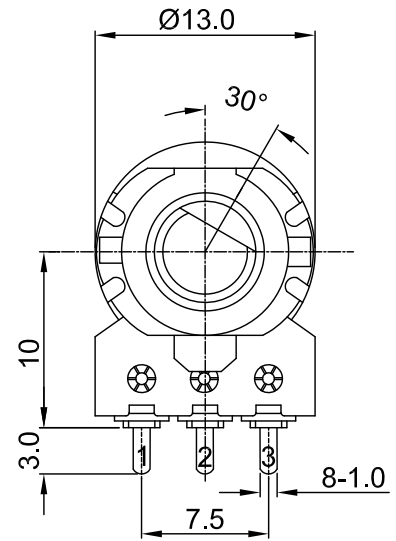


外形图 Mechanical Dimensions

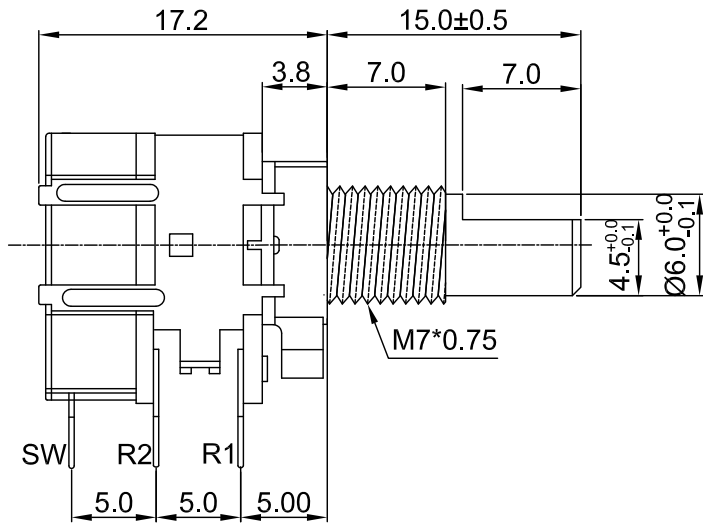


接线图
Circuit explanation




Shaft shown in full
C.C.W. position

安装孔位置图
P.C.B. mounting hole detail

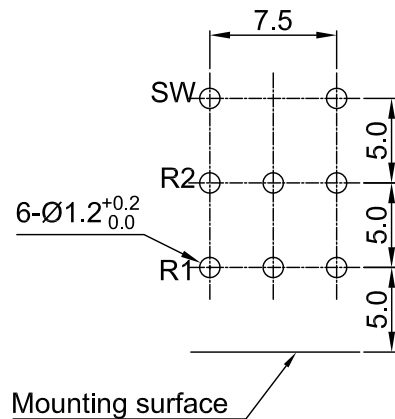

Attached parts: nut & washer

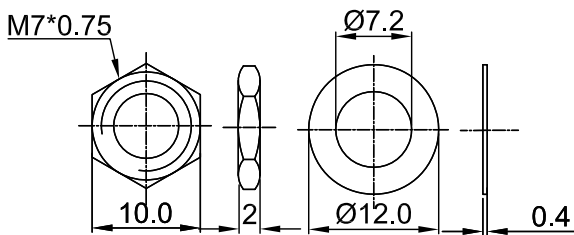


3				PRODUCT NAME	Rotary Potentiometer			
2				MODEL NAME	RD1210GS-AA1-value-WZ			
1	NO	DATE	DESCRIPTION	APPROVED BY	CHECKED BY	DRAWN BY		
	DIMENSION	TOLERANCE	SCALE	<div style="border: 1px solid black; border-radius: 50%; padding: 5px; width: 60px; margin: 0 auto;"> <b style="color: red;">R & D 2014/3/6 Eva </div>	<div style="border: 1px solid black; border-radius: 50%; padding: 5px; width: 60px; margin: 0 auto;"> <b style="color: red;">R & D 2014/3/6 Sophie </div>	<div style="border: 1px solid black; border-radius: 50%; padding: 5px; width: 60px; margin: 0 auto;"> <b style="color: red;">R & D 2014/3/6 Ball </div>		
	$\int \leq 10$	± 0.2	UNIT					mm
	$10 < \int \leq 30$	± 0.5	VER.					A0
	$30 < \int \leq 100$	± 1.0	DATE					2013/05/30
	All Angles	$\pm 5^\circ$						

12 mm Rotary Series Potentiometers with SW Specifications


1. 電氣性能 (Electrical Characteristics)					
1.1	全阻抗值 (Total Resistance)		1KΩ ~ 2MΩ		
1.2	全阻抗值允許偏差 (Total Resistance Tolerance)		±20% (More than 1 M Ω ±30%)		
1.3	電阻隨溫度變化特性 Resistance of temperature change character)		20℃-75℃:ΔR/R≤±5%, -25℃-20℃:ΔR/R≤±4.5%		
1.4	阻值變化特性 (Resistance Taper)		A, B, C, W		
1.5	零位阻值 (Residual Resistance)		R>250KΩ / 0.1 % max. of total Value 250KΩ>R>10KΩ / 20Ω max. 10KΩ>R / 10Ω max.		
1.6	額定功率 (Rated Power)		Linear Taper B: 0.05W Other Taper:0.025W		
1.7	最高使用電壓 (Max.Operating Voltage)		100V AC		
1.8	動雜音 (Rotational Noise)		Less Than 100mV		
1.9	絕緣阻抗 (Insulation Resistance)		More than 100MΩ at DC 250V		
1.10	耐電壓 (Withstand Voltage)		For 1 minute at: AC 250V		
1.11	開關額定功率(Switch Rated Power)		DV 12V , 0.5A max		
1.12	同步誤差 (Gang Error)		-40dB~0dB≤3dB		
2. 機械性能 (Mechanical Characteristics)					
2.1	全回轉角度 (Rotation Angle)		300°±5°		
2.2	旋轉力矩 (Rotation Torque)		20~200gf.cm		
2.3	軸的拉、押強度 (Pull-Push Strength)		5 Kgf.cm		
2.4	轉動止檔強度 (Rotational Stop-End Torque)		3 kgf.cm Min		
2.5	開關角度(Switch Working Angel)		≤50°		
2.6	開關力矩(Switch Working Torque)		50~350gf.cm		
2.7	旋轉定位數目 (Number of Detents(click))		-----		
2.8	焊錫耐熱性 (Resistance To Soldering Heat)		260±5℃ and less than 3 seconds		
3. 耐久性能 (Durability)					
3.1	回轉壽命 (Rotation Life)		10,000 Cycles min.		
3.2	工作溫度 (Operating temperature)		-10℃~+70℃		
4.1	外形尺寸圖/曲線特性圖 (Shape size drawing/curve characteristic drawing)		見附頁 Please refer the drawing		
批 准		審 核		設 計	

RESISTANCE TAPER


TAPER B SERIES

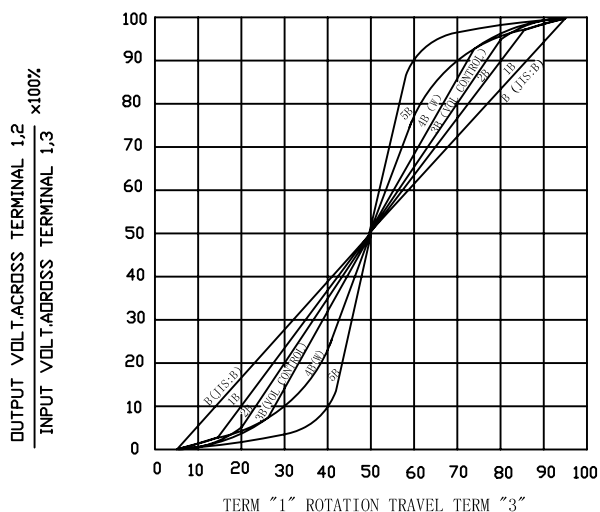


TAPER B WITH 50% TAP

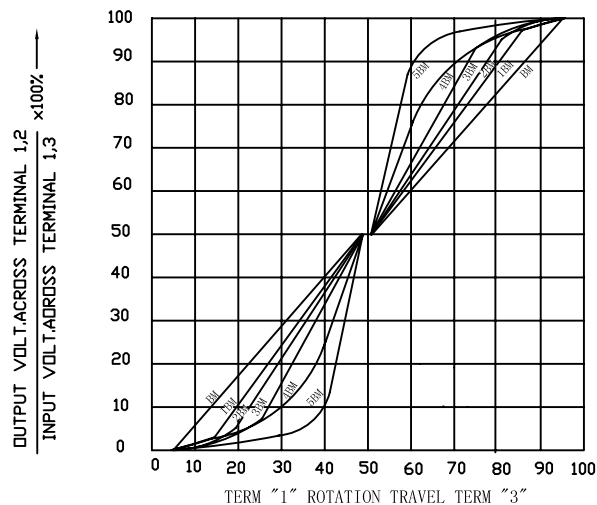


TAPER A SERIES

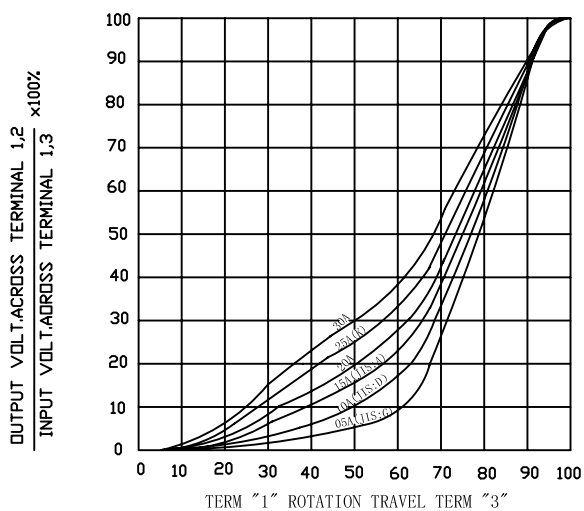

TAPER A & C WITH 50% TAP

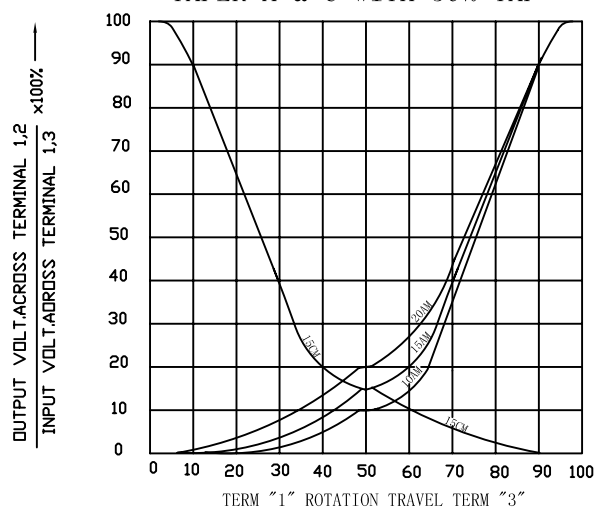

TAPER C SERIES

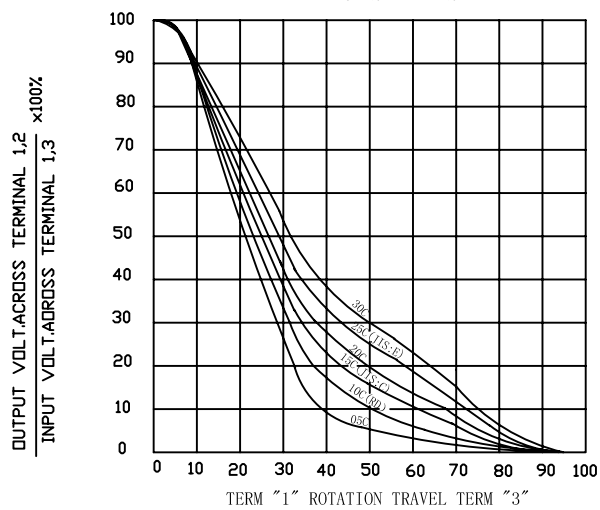

TAPER M & N SERIES

